



ECClos®-S

Conveyor system closure designed as a robust damper made of sheet metal panels

Product description

The sheet metal damper is characterised by its robust sandwich construction with sheet metal casing on all sides. It is suitable for interrupted and continuous conveyor systems such as belt, roller and suspension chain conveyors. Segmented damper elements enable smooth conveyance to the installation site. Variable fixed panels provide for easy implementation of customer-specific solutions.

Type	Fire protection closure as part of track-bound conveyor systems	Closing cycles	C5 number of closing cycles 200,000 • classified according to DIN EN 13501-2
Proof of usability	European Technical Assessment - ETA	Re-opening	electromotive (standard) • manual
Closing direction	from left to right • from right to left • from top to bottom	Conveyor system	Skid conveyor • Sloping track • Interrupted conveyor system • Continuous belt conveyor system • Continuous travelling carriages • Continuous suspension chain conveyor • Continuous roller conveyor system • Continuous conveyor system
Fire resistance	EI 120		

Constructive system design (Horizontal)

Required wall quality


Masonry	$d \geq 200 \text{ mm}$
Concrete	$d \geq 200 \text{ mm}$
Aerated concrete	$d \geq 200 \text{ mm}$
Assembly walls	$d \geq 160 \text{ mm}$
panelled steel construction	acc. to DIN 4102-4

approval range (max 13.6sqm)

LW	4500 mm
LH	4500 mm

technical feasibility

LW	4500 mm
LH	5100 mm

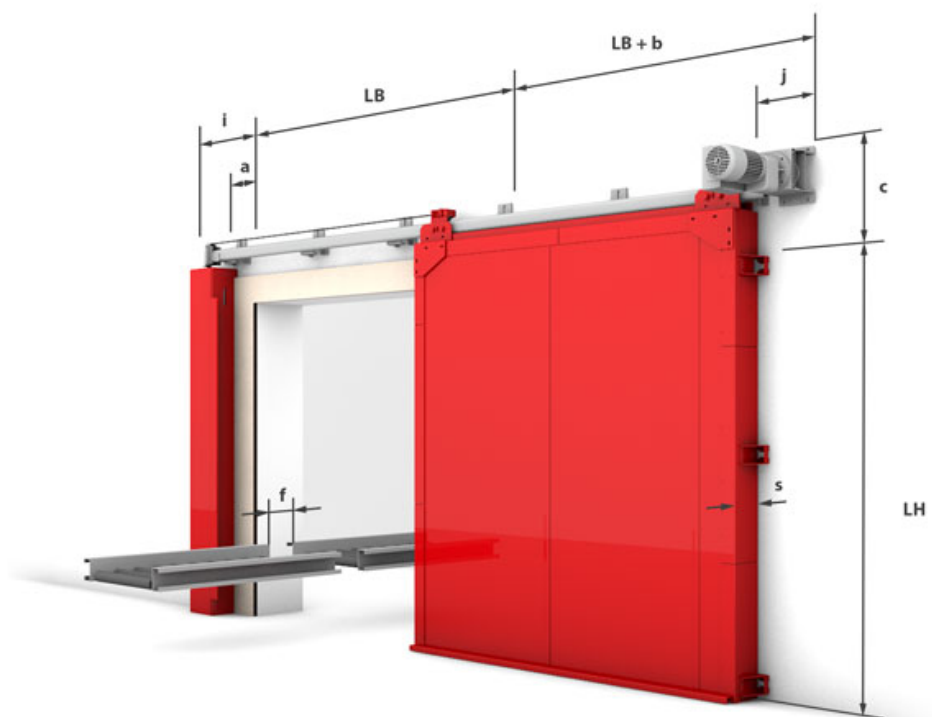

a = 187 **b** = 590 **c** = 410 **f** = ≥ 164 **i** = 410 **j** = 150 **s** = 122

Constructive system design (Vertical)

Required wall quality


Concrete	$d \geq 200 \text{ mm}$
Masonry	$d \geq 200 \text{ mm}$
aerated concrete	$d \geq 200 \text{ mm}$
assembly walls	$d \geq 160 \text{ mm}$
panelled steel construction acc. to	DIN 4102-4

approval range (12.1 m² vertical closing direction)

LW	up to 4500 mm
LH	up to 4500 mm

technical feasibility (max. 20.25 m²)

LW	up to 4500 mm
LH	up to 5100 mm

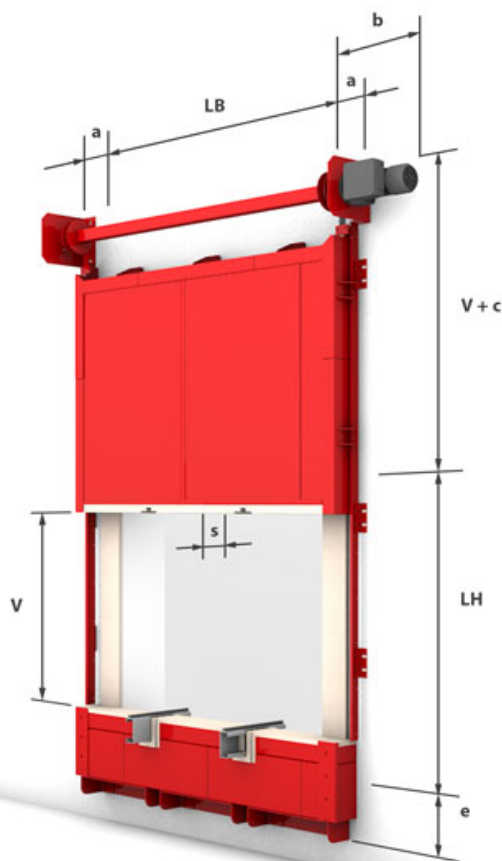

a = 245 **b** = 660 **c** = 550/625 **e** = ≥ 0 **s** = 122